




MEDIUM-INTENSITY DUAL OBSTRUCTION LIGHT STANDARDS (FAA STYLE E)

Day / Twilight Protection = 20,000 cd White Light
 Night Protection = 2,000 cd Red Light and 32 cd side lights
 (Painting of tower is typically not required)

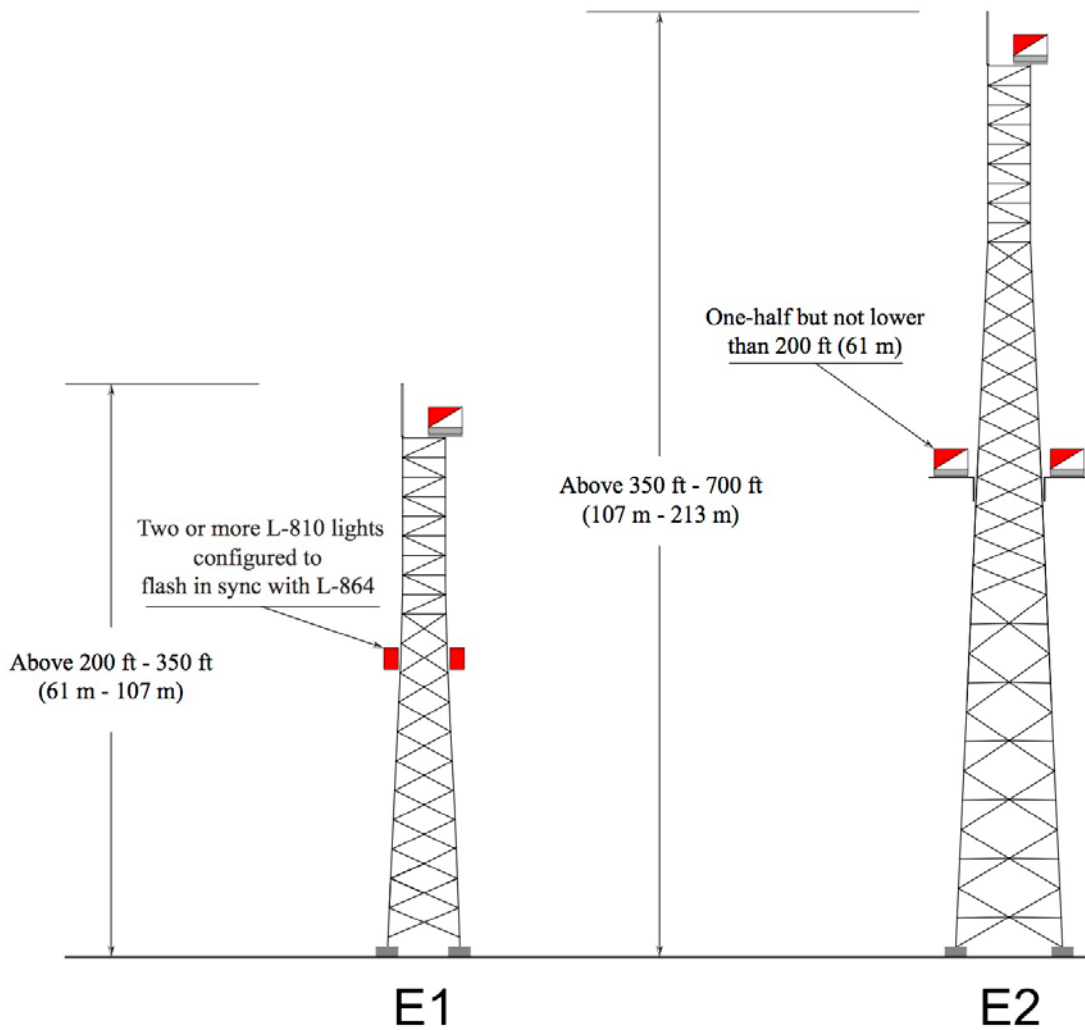

-  = L-864 / L-865 (Flashing Dual [Red / White] Light
L-864 configured to flash at a rate of 30 fpm (± 3 fpm)
-  = L-810 (Single Light)
Configured to flash in sync with L-864

Source: AC 70/7460-1L - Obstruction Marking and Lighting