

A650 Solar Taxiway and Barricade Light

Meets traditional airfield requirements for taxiways and general purpose marking.

- ICAO and FAA compliant
- Greater than 10 cd of intensity
- Dusk-to-dawn or on-demand operation
- NVG compatible IR LEDs available

Applications

- Taxiway and apron edge
- Construction, barricades and fences
- Temporary or permanent markings
- Helipads
- Hazard marking

Compliant Output

FAA L-861T and ICAO Annex 14. The A650 Wireless Blue is compliant with the requirements of ICAO Annex 14, Volume 1, Sixth Edition (2013).

Easy Installation and Relocation

No specialized work crew required. Lights are immediately operational with limited air traffic disruption. The A650 can be quickly relocated for temporary or emergency applications.

Self-contained and Low Maintenance

All components are incorporated within a compact, stand-alone unit. The A650 features a replaceable battery pack that extends the service life beyond five years, reducing the total cost of ownership and resulting in significant cost savings.


Unprecedented Reliability

Energy Management System (EMS) monitors and adapts the brightness to environmental conditions for consistent operation and long life under the toughest conditions.

Designed and Tested to Tough Industrial Standards

MIL-STD-202G Humidity, Immersion, Vibration, Shock; MIL-STD-810G: Solar Radiation, Salt Fog; EN 60945: ESD, EMI, EMC; IP68; L70. The A650 is acceptable for barricade and construction applications at Commercial Part 139 Airports under FAA Advisory Circular AC 150/5370-2E.




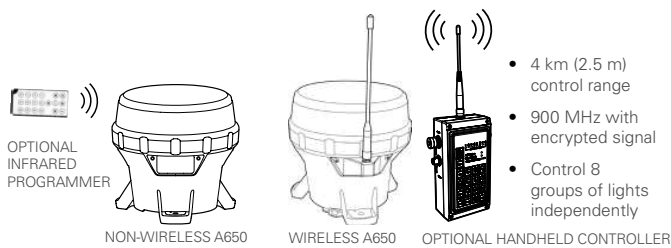

SPECIFICATIONS

Solar Panel	High-efficiency cells with bypass and blocking diode function Maximum power point tracking (MPPT) for optimal energy collection
Battery	Tool-less, replaceable and recyclable best-in-class battery pack with extreme temperature range Battery status feedback of Good, Charge or Bad (Replace)
Light Source	High power LED Color-specific temperature corrected LED drivers provide consistent intensity under all operating conditions
Intensity	Greater than 10 cd intensity, steady-on (see photometric plots)
Flash Patterns	256+ (non-wireless) Steady-on mode and flash patterns (wireless)
Construction	Premium grade UV resistant, polycarbonate/polysiloxane co-polymer body and lens material Double O-ring sealing with waterproof vent
Colors	Blue, Red, Yellow, Green and White ICAO and SAE25050 (FAA) compliant chromaticity NVG-compatible infrared (IR) LEDs (wireless only)
Operating Temperature	-43 to 51 °C (-45 to 124 °F) ambient temperature The A650 will function up to 190 °F (88 °C) internal and surface temperatures
Storage Temperature	-43 to 80 °C (-45 to 176 °F)
Color Indicator	Yes, FAA Eng. Brief 67 compliant
Weight	1.6 kg (3.5 lb)
Wind Loading	644 kph (400 mph)
Automatic Light Control (ALC)	When enabled, ALC will dynamically reduce brightness in response to unusually low amounts of sunlight to ensure continued operation
Radio Receiver	900 MHz ISM (wireless)
Range	Up to 4 km (2.5 m) (wireless)


DIMENSIONS

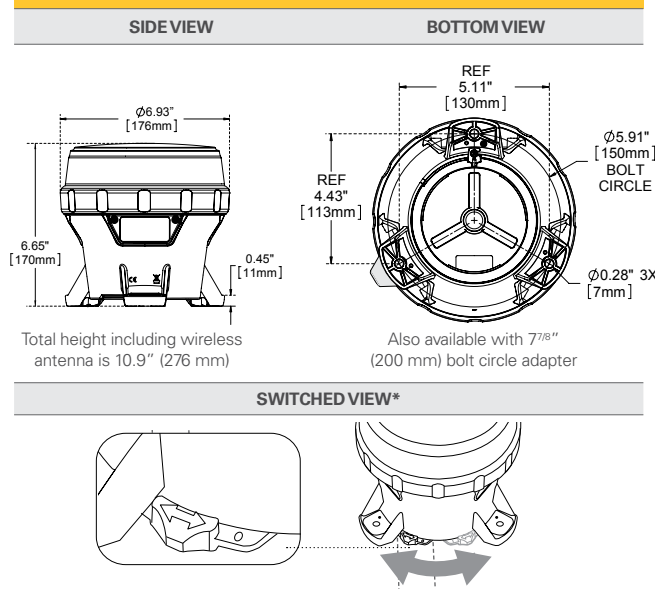

Specifications subject to local environmental conditions.
Specifications may be subject to change.


PHOTOMETRICS

A650 NON-WIRELESS

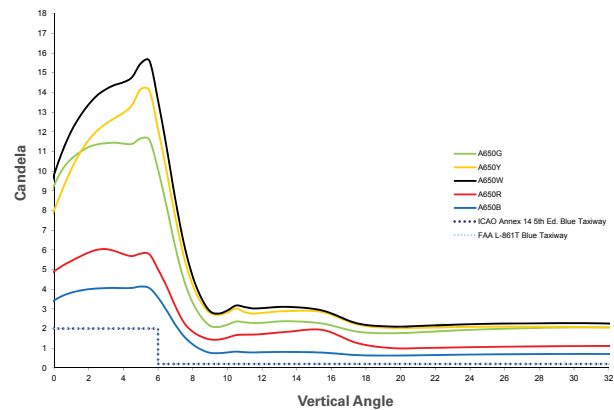

Note: Intensity dependent on location. Based on equatorial location of 12-hour night duration and steady-on (001) flash code.

A650 WIRELESS

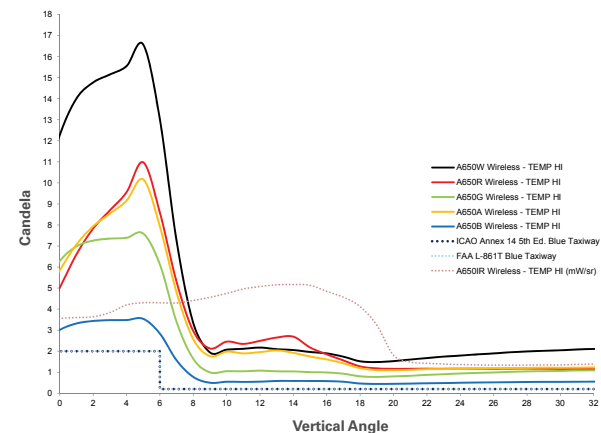

CONFIGURATION

MODEL	OUTPUT ▼	SWITCH ▼	CONTROL ▼
A650	RED GREEN WHITE YELLOW BLUE	NON-SWITCHED SWITCHED*	NON-WIRELESS WIRELESS*

*A650 Wireless version must have switch.




A650 Accessories

MOUNTING HARDWARE		
REF.	PART NO.	DESCRIPTION
1	84174*	Standard bolt kit, A650 series (3x stainless steel bolts)
2	81802*	Rubber Mat
3	61869*	Fence mounting kit with hardware
4	66699*	Standard mounting plate (14" installed height)
5	82612*	Frangible floor flange
6	76520*	Anchor bolt kit
7	61870	Stake mounting kit, soft ground
-	38925*	2" hub stake - 15" long
-	61867*	Magnet mounting kit (3x magnets, nuts & washers)
-	69752*	Extended mounting plate (24" installed height)



A650 SERIES MOUNTING HARDWARE OPTIONS

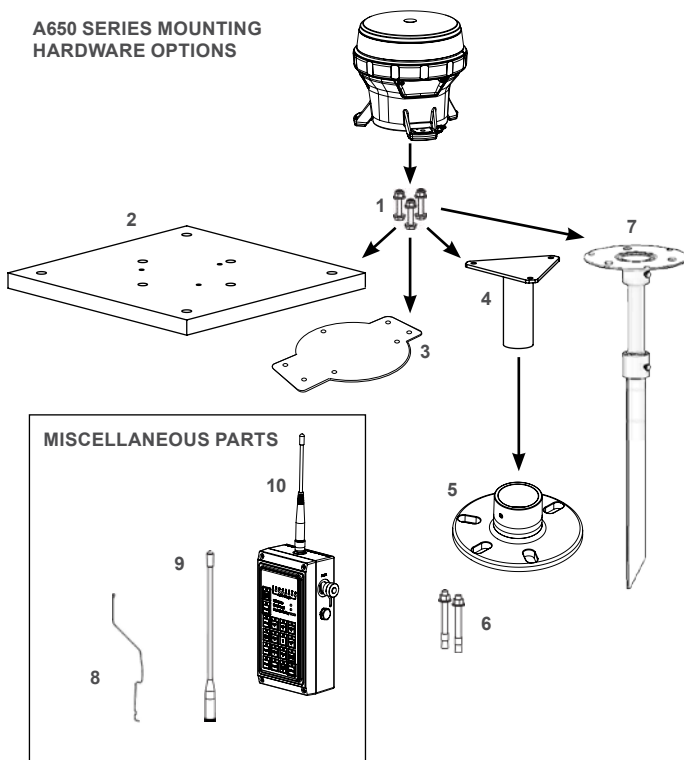

Additional options available. Please inquire.

BATTERY/CHARGER		
REF.	PART NO.	DESCRIPTION
-	72835	Battery kit, A650 series
-	59188	Charger: A650, 100-240 VAC 50/60 Hz

MISCELLANEOUS PARTS		
REF.	PART NO.	DESCRIPTION
8	57003	Bird deterrent, A650 series
9	56150	Replacement antenna
10	83227	Handheld Controller
-	57392	Bottom cover replacement kit (with switch)
-	57393	Bottom cover replacement kit (without switch)
-	59198	Bottom cover access tool
-	48984	Installation tool kit with 5/32" security bit for head/battery changes and small socket set

*A550 SERIES PRODUCTS

Accessories marked with an asterisk (*) are suitable for use with the A550 airfield light. For additional information, please contact Flight Light Inc.

