

# Q-Obstruction Light Low Intensity 10/32/50 cd

## Certificates



## Applications



The Q-Obstruction Light Low Intensity 10/32/50 cd is an ICAO and CAP437 compliant obstruction light for all facilities. With a dip switch you can change this product from 10/32/50 cd, so the desired output can be chosen all times. The light operates on both 24 VDC and 100-240 VAC.

## Technical Specifications

- Application: Obstruction lighting
- Classification: Safe Area
- Light Source: LED, steady burning
- Light Color: Red, 630nm
- Light Intensity: 10 / 32 / 50 cd
- Vertical Beam Profile: as per ICAO
- Color Chromaticity: as per ICAO
- Enclosure: Aluminum, powder coated (RAL 5015) / borosilicate glass
- Mounting: Rigid, 4 x M8
- Input Voltage: 1) 100-240 VAC 50-60 Hz  
2) 24 VDC
- In Compliance With: ICAO Low-intensity, Type A & Type B
- Cable Glands Included: 1 x M16 x 1.5mm
- Cable Outer Dimension: 5 - 10mm
- Consumption: 1 Watt
- Life Expectancy: 100,000+ hours
- Warranty: 2 Years
- IP Index: IP 66
- Weight: .66 lb. (0.3 kg)



## Dimensions

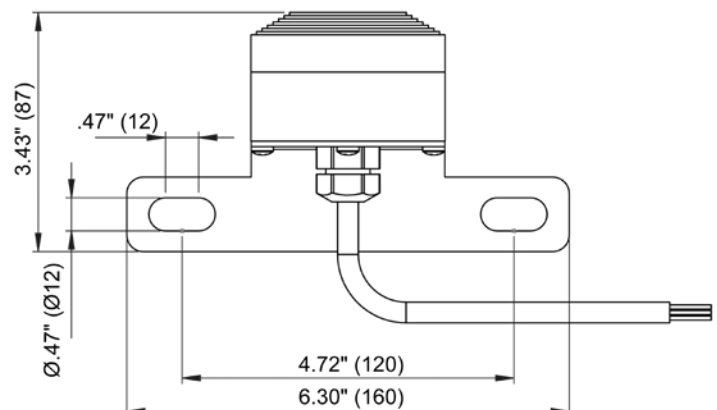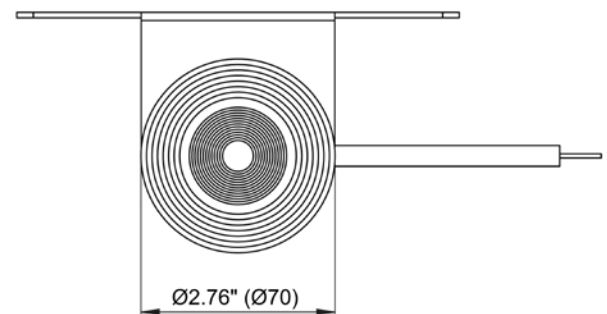

## Ordering Codes

### Part Number

**Q80RI03:** Q-Obstruction Light Low Intensity 10/32/50 cd

+1.800.806.3548 USA  
+1.916.394.2800 Worldwide  
+1.916.394.2809 Fax

[www.flightlight.com](http://www.flightlight.com)  
[sales@flightlight.com](mailto:sales@flightlight.com)

Flight Light Inc., 2708 47th Ave.  
Sacramento, CA, 95822, USA

Product specifications may be subject to change without prior notice. Verify current specifications when ordering. © Flight Light Inc. | 7/19/2023