

Q-Obstruction Light Low Intensity 10/32/50 cd

Certificates



Applications


The Q-Obstruction Light Low Intensity 10/32/50 cd is an ICAO and CAP437 compliant obstruction light for all facilities. With a dip switch you can change this product from 10/32/50 cd, so the desired output can be chosen all times. The light operates on both 24 VDC and 100-240 VAC.

Technical Specifications

- Application: Obstruction lighting
- Classification: Safe Area
- Light Source: LED, steady burning
- Light Color: Red, 630nm
- Light Intensity: 10 / 32 / 50 cd
- Vertical Beam Profile: as per ICAO
- Color Chromaticity: as per ICAO
- Enclosure: Aluminum, powder coated (RAL 5015) / borosilicate glass
- Mounting: Rigid, 4 x M8
- Input Voltage: 1) 100-240 VAC 50-60 Hz
2) 24 VDC
- In Compliance With: ICAO Low-intensity, Type A & Type B
- Cable Glands Included: 1 x M16 x 1.5mm
- Cable Outer Dimension: 5 - 10mm
- Consumption: 1 Watt
- Life Expectancy: 100,000+ hours
- Warranty: 2 Years
- IP Index: IP 66
- Weight: .66 lb. (0.3 kg)



Dimensions

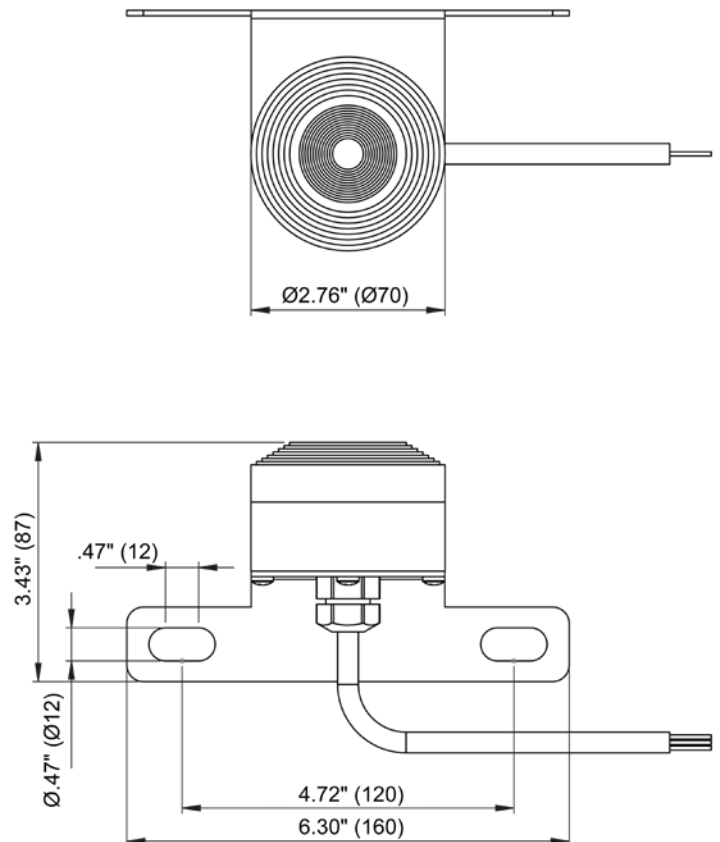

Ordering Codes

Part Number

Q80RI03: Q-Obstruction Light Low Intensity 10/32/50 cd

+1.800.806.3548 USA
+1.916.394.2800 Worldwide

www.flightlight.com
sales@flightlight.com

Flight Light Inc., 2708 47th Ave.
Sacramento, CA, 95822, USA