



Flight Light Inc.
2708 47th Ave.
Sacramento, California, U.S.A.
95822-3806



PH (916) 394-2800 FX (916) 394-2809
TF (800) 806-3548 EM info@flightlight.com

L-810 LED Steady-Burning Red Obstruction Light

Compliance and Applications

ETL Certified L-810:

FAA AC 150/5345-43G; EB-67D
Suitable for use in Class I, Div. 2, Groups A, B, C, D
hazardous locations; T4A rated (US & Canada only).

Compliant to:

ICAO Annex 14, Low Intensity Obstacle Light, Type B
Transport Canada CAR 621.19
DGAC of Mexico
MIL-C-7989

Our L810LED omni-directional, red, steady-burning obstruction light is designed for marking tall structures such as buildings, towers, masts, cranes, meteorological towers, chimneys and other hazards to aircraft. This energy-saving LED light is a direct replacement for incandescent fixtures, providing years of reliable and maintenance-free operation. Available in single, double, and retrofit configurations; optional solar drive package.

Why Our L810LED is Better

- Direct replacement for existing incandescent light.
- Lasts up to 10 times longer than an incandescent light.
- Uses 96% less power than an incandescent light.
- No regular maintenance.
- Available in single and dual configurations with bottom or side conduit outlets.
- Can be operated in steady-burning or flashing mode (controller not supplied).
- Suitable for use in hazardous locations (US & Canada only).
- Photocell option for automatic activation at night.
- Self-contained wiring compartment eliminates additional boxes.
- Weather/corrosion resistant.
- Resistant to shock and vibration.
- Operates from -67°F to 131°F (-55°C to +55°C).
- 5 year warranty.

Specifications

- Power consumption: 1.8W (DC); 3.8W (AC)
- Power source: 120VAC, 208-277VAC, 12-48VDC
- Intensity: 32.5 candelas
- Dimensions: 5.5" dia. x 7.85" height (single)
- Weight: 2 lb. (single); 5 lb. (double)
- Estimated lifetime: 70,000+ hours
- Wind loading: Effective Projected Area of the L-810 with single mounting base is 23.125 square-inches




Optional Low Surface Mount



Shown with Riser, Frangible Coupling and Floor Flange



Single Obstruction Light

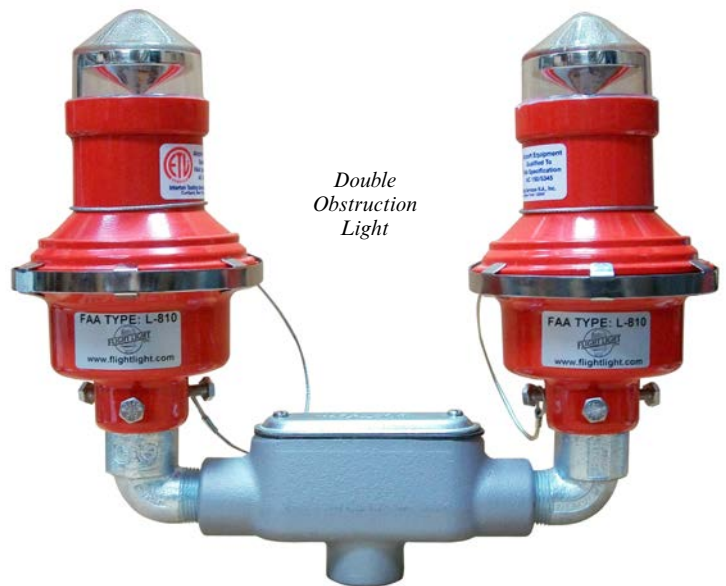

Double Obstruction Light

Visit our web site: www.flightlight.com



Flight Light Inc.
 2708 47th Ave.
 Sacramento, California, U.S.A.
 95822-3806



L-810 LED Steady-Burning Red Obstruction Light


PH (916) 394-2800 FX (916) 394-2809
 TF (800) 806-3548 EM info@flightlight.com

Spare Parts

61-80001	Fixture Clamp Band
61-80003-R	Fixture Base
61-80002	O'Ring
68-ME75-100	Connector: 3/4" Male to 1" Female

Shipping Information:

Single: 2 lb. (0.91 kg); Carton: 14" x 7" x 13"
 (2 units)
 Double: 5 lb. (2.27 kg); Carton: 14" x 7" x 13"

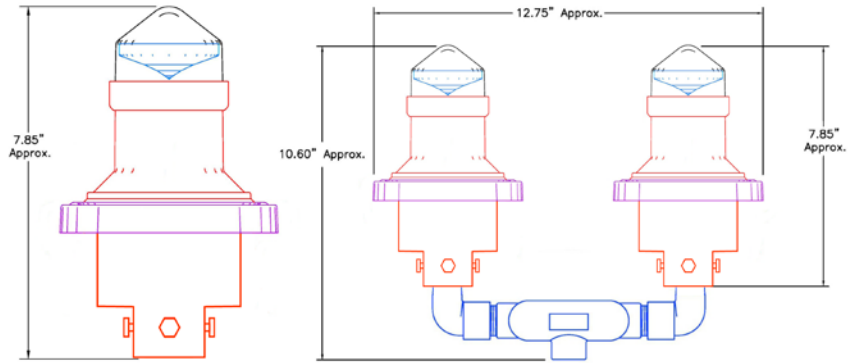

Ordering Codes

Fixture	Color	Power	Fixture Style	Mounting	Options
FL-810L	R: Red	AC1: 120 VAC AC2: 240 VAC AC3: 277 VAC DC: 12/24/48 VDC	S: Single D: Double	34B: 3/4" Hub - Bottom 10B: 1" Hub - Bottom 34S: 3/4" Hub - Side 10S: 1" Hub - Side FF: Floor Flange LSM: Low Surface Mount*	F: Flasher MT: Marine Treated P: Photocell T: Transfer Relay**

* For single option only. ** For 120/240VAC applications only.

Obstruction Lighting Controls

Lighting controls are designed for use when multiple obstruction light fixtures are to be controlled with common electronics. The electronic control module comes in a cast iron device box with threaded hubs on both top and bottom. Replacement modules (controls without device box) are also available upon request.

Photocell

Model 81020 120VAC, 1000W photocell. FAA style photocells activate at 35 ft-cd and turn off at 58 ft-cd. A 45 second time delay prevents activation and de-activation from momentary light conditions. Does not come with device box, includes 1/2" threaded male fitting.

Model 81021 120VAC, 4800W photocell. Meets FAA/FCC requirements for obstruction lighting. Energized at 35 ft-cd and de-energized at 60 ft-cd. Time delay eliminates contact chatter. Contains dual 20A load contacts. Front plastic housing mounts to cast aluminum junction box (included).

Model 81022 Hazardous Location Photocontrol Unit. Outdoor lighting control for exterior lighting in hazardous locations: explosion proof, dust-ignition proof, and weatherproof. Nominal Voltage 50/60 Hz: 120/208/240/277. Voltage Range: 105-305. Housing: sand cast copper-free aluminum - epoxy powder coated.



Model 81020



Model 81021



Model 81022

Fixture Type	Model
FL-	81020: Photocell only (120VAC, 1000W max)
	81021: Photocell with aluminum box (120VAC, 4800W max)
	81022: Hazardous Location Photocontrol Unit

Visit our web site: www.flightlight.com